



 **novamix**  
ADVANCED BUILDING MATERIALS

# PLANOCOLOR® PREMIUM TERRA

# NOVACOLOR DESIGN TERRA



## Decorative microcement coating for walls and floors

- One component
- Excellent workability
- High mechanical strength
- Quick application
- Smooth texture
- Applied on walls, floors, bathrooms, in internal and external areas
- Consumption: 2,0 – 2,5 kg/m<sup>2</sup> on walls and 3,0 – 4,0 kg/m<sup>2</sup> on floors with NOVAMIX FIBERGLASS NET incorporation
- Packaging: 20kg


## Pigments in liquid form

- Designed for mixing with PLANOCOLOR® PREMIUM TERRA microcement coating
- Mixing ratio: 1 NOVACOLOR DESIGN TERRA pigment for every 20kg of PLANOCOLOR® PREMIUM TERRA powder
- Available in 60 UV resistant, shades of the PLANOCOLOR® PREMIUM TERRA COLOR CHART
- Packaging: 250 ml




# 60 SHADES



## SHADOW

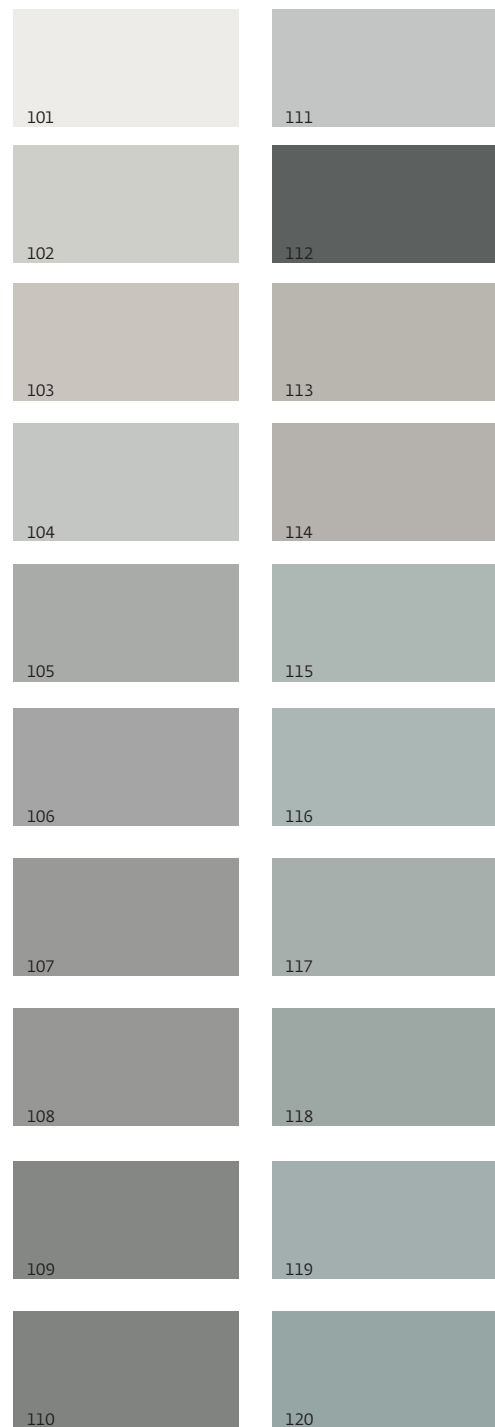


## LIGHT

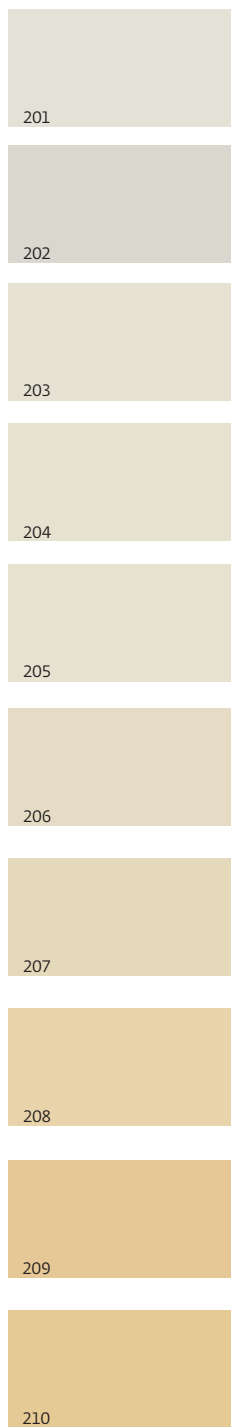

## EARTH

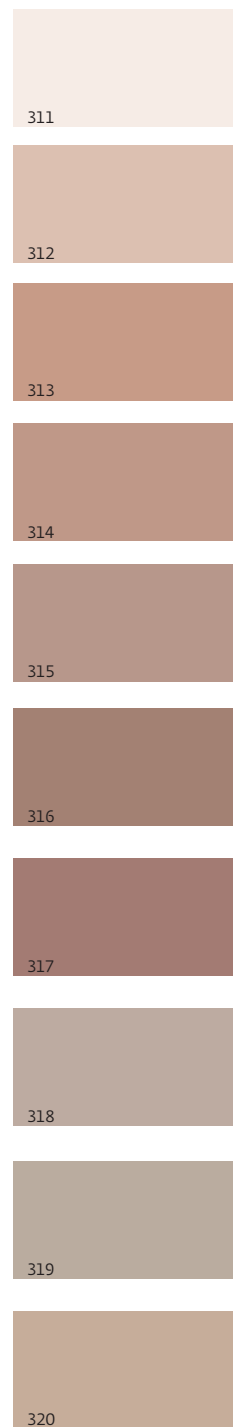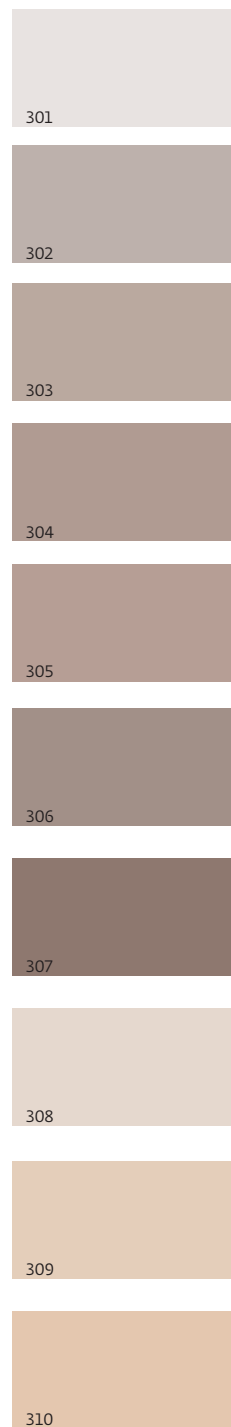


## SEA

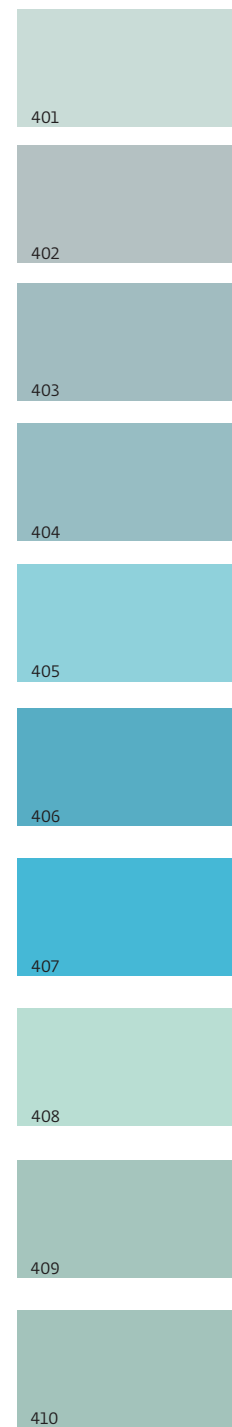

# novamix

## ADVANCED BUILDING MATERIALS

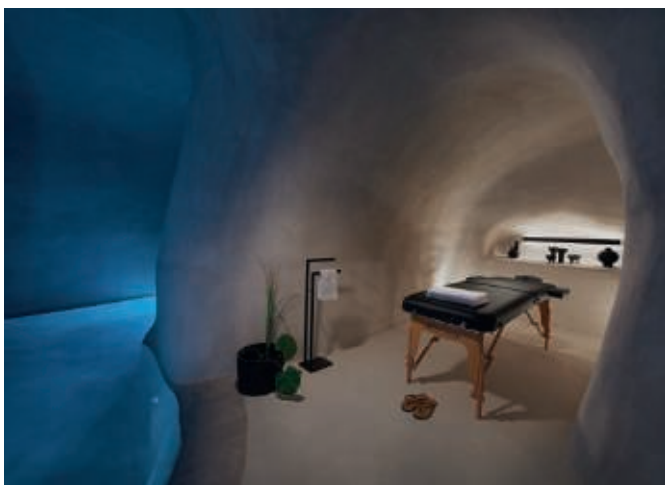

Special thanks for the photographic material to  
**DIVINE CAVE EXPERIENCE** ([www.divinesuites.com](http://www.divinesuites.com))



This edition was published in 2022 by **DOMOCHEMICAL S.A.**  
Copyright © 2022 **DOMOCHEMICAL S.A.**

*No part of this publication may be reproduced, stored in a retrieval system or transmitted by any means, electronic, mechanical, photocopying or otherwise, without prior permission of the publisher.*

*Legal Notice: The technical data and recommendations included or listed are the outcome of laboratory measurements combined with our current knowledge and expertise. All information and specifications should in any case be considered as indicative. The Company makes every effort to ensure the accuracy of the information provided herein. Product specifications are subject to change without notice and may differ from product images. Due to printing and application procedures, the colors displayed here should be considered as indicative. In particular, variations in materials, substrates and on-site application conditions are such that no warranty can be given or implied reference to the suitability of the materials for trading or use for a particular purpose and conditions of any given project. Anyone interested in using the product must ensure beforehand that the product is suitable for the intended use and in any case, the user is solely responsible for any outcomes associated with the use of product. Among other things, the Company is not responsible for any normal wear or tear from environmental or any other unsuitable conditions. We reserve the right to revise or change the data herein without prior notice. Restrictions and disclaimers apply to the extent permitted by applicable law. The Company has a Technical Support Department, which has exclusive responsibility for providing technical advice and solutions, addressing relevant issues. Requests to the technical Support Department are addressed and answered, only in writing. For the latest and valid version of the Technical Data Sheet, the user of the material must refer to our website [www.novamix.gr](http://www.novamix.gr).*



SCAN ME



EN ISO  
14001: 2015



EN ISO  
9001: 2015

**DOMOCHEMICAL S.A.**  
40 PAPANIKOLI STR., CHALANDRI, 15232, ATHENS  
T. +30.210.6893.953 F. +30.210.6893.953  
E. [NOVAMIX@NOVAMIX.GR](mailto:NOVAMIX@NOVAMIX.GR)

[www.novamix.gr](http://www.novamix.gr)

I<sup>st</sup> 04/2022